


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 14.29 lm/W			
MODEL		I _{max} (cd)	16.89	S/MH(C0/180)	1.24
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.38
RATED VOLTAGE(V)		TOTAL FLUX(lm)	56.531	η UP,DN(C0-180)	0.5,49.6
NOMINAL FLUX(lm)	56.531	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.5,49.5
LAMPS INSIDE	1	η up(%)	1.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)		η down(%)	99.0	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

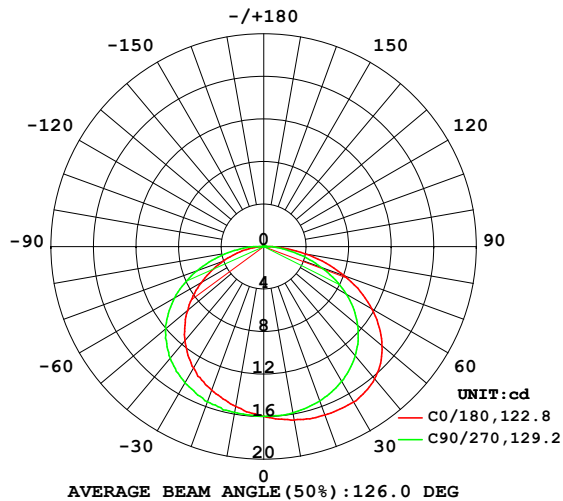

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

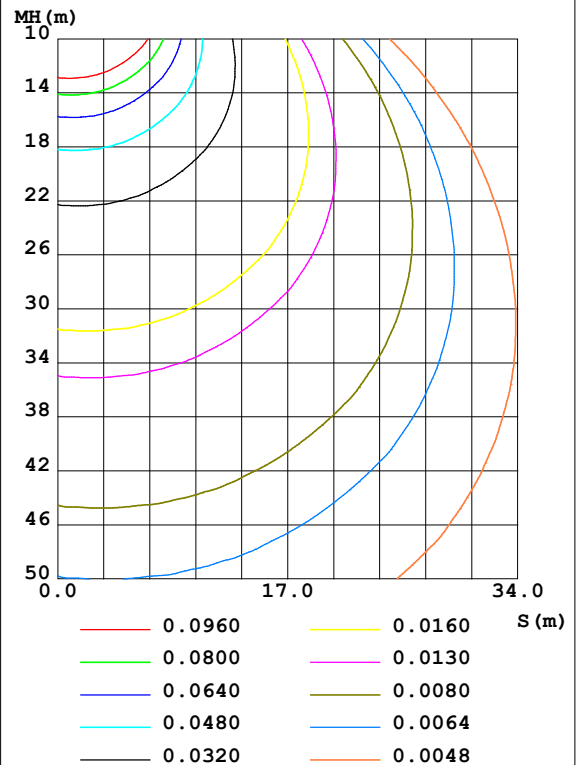

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	16.56	16.27	15.86	15.34	15.24	15.44	15.83	16.31	0- 10	1.518	1.518	2.68,2.68
20	16.85	16.33	15.45	14.53	14.36	14.68	15.55	16.38	10- 20	4.445	5.963	10.5,10.5
30	16.88	16.24	14.64	13.50	13.18	13.65	14.81	16.11	20- 30	7.034	13.00	23,23
40	16.22	15.39	13.38	12.09	11.53	12.29	13.68	15.43	30- 40	9.003	22.00	38.9,38.9
50	14.52	13.80	11.53	10.10	9.337	10.36	12.03	14.01	40- 50	9.980	31.98	56.6,56.6
60	11.77	11.23	8.979	7.531	6.803	7.932	9.702	11.64	50- 60	9.628	41.61	73.6,73.6
70	8.108	7.666	5.805	4.530	4.117	5.054	6.694	8.248	60- 70	7.808	49.42	87.4,87.4
80	3.987	3.645	2.616	1.798	1.646	2.267	3.444	4.265	70- 80	4.847	54.26	96,96
90	0.2474	0.6871	0.5781	0.3477	0.0911	0.4251	0.8038	0.8278	80- 90	1.728	55.99	99,99
100	0.0610	0.1828	0.1674	0.0754	0.0305	0.0152	0.0608	0.0603	90-100	0.2283	56.22	99.5,99.5
110	0.0610	0.0609	0.0609	0.0603	0.0305	0.0609	0.0608	0.0603	100-110	0.0649	56.29	99.6,99.6
120	0.0610	0.0609	0.0608	0.0603	0.0305	0.0609	0.0759	0.0603	110-120	0.0550	56.34	99.7,99.7
130	0.0610	0.0609	0.0608	0.0603	0.0305	0.0609	0.0759	0.0754	120-130	0.0534	56.39	99.8,99.8
140	0.0610	0.0609	0.0608	0.0603	0.0305	0.0609	0.0759	0.0754	130-140	0.0478	56.44	99.8,99.8
150	0.0610	0.0609	0.0608	0.0603	0.0305	0.0609	0.0759	0.0754	140-150	0.0388	56.48	99.9,99.9
160	0.0610	0.0609	0.0608	0.0603	0.0305	0.0609	0.0759	0.0754	150-160	0.0286	56.51	100,100
170	0.0610	0.0609	0.0608	0.0603	0.0305	0.0609	0.0759	0.0151	160-170	0.0166	56.53	100,100
180	0.0610	0.0609	0.0608	0.0603	0.0763	0.0609	0.0759	0.0151	170-180	0.0053	56.53	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 26.946 lm

%lum = 47.7%

%lamp = 47.7%

Conical surface Flux(120deg): 41.609 lm

%lum = 73.6%


%lamp = 73.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:

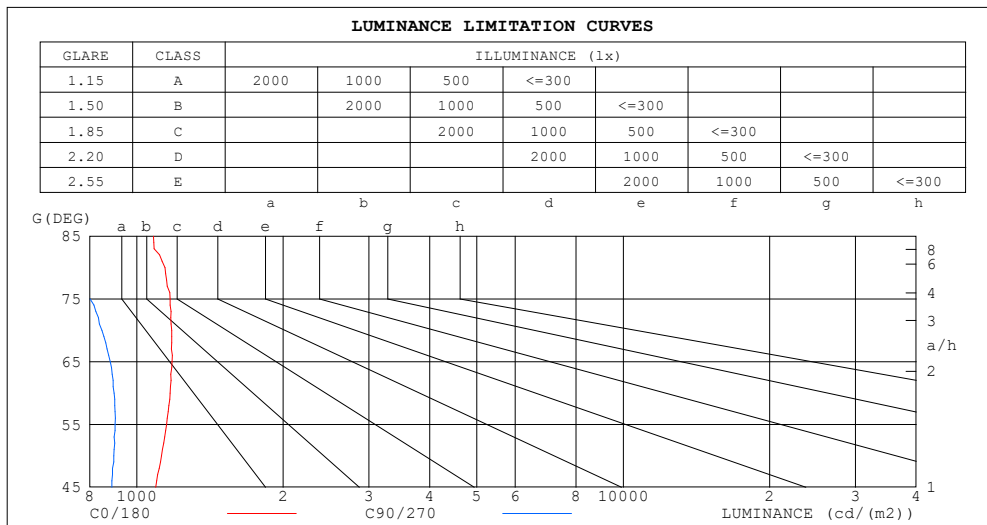

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1083	777
80	1142	753
75	1171	802
70	1179	848
65	1183	882
60	1171	898
55	1152	903
50	1123	897
45	1093	889


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JINZHI
Test Date: 2021-06-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.660m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz		
Lamp Flux:56.53lx1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

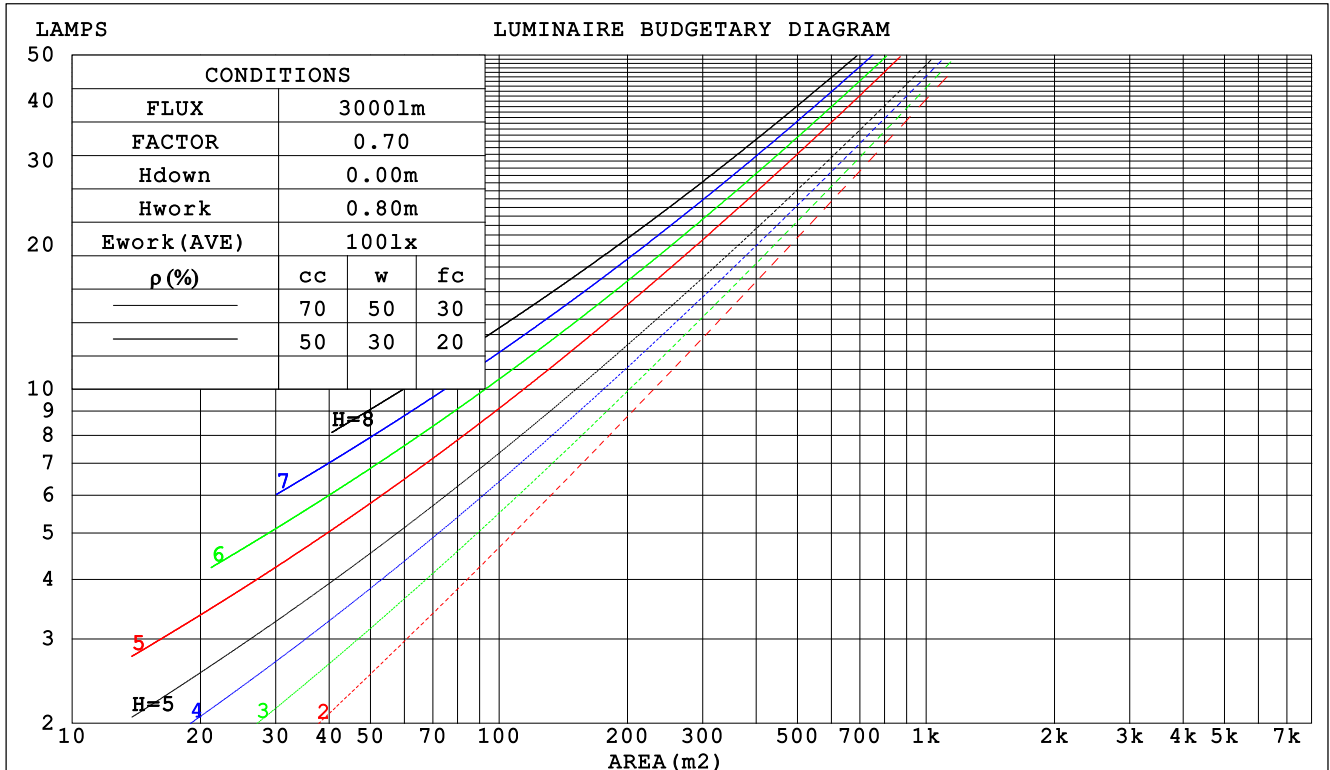

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz		
Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.337	.192	.061	.330	.188	.060	.316	.181	.058	.303	.175	.056	.291	.169	.054		
2.0	.312	.171	.052	.305	.168	.052	.293	.163	.051	.281	.158	.049	.271	.153	.048		
3.0	.286	.152	.046	.280	.150	.045	.269	.146	.044	.259	.142	.043	.249	.138	.043		
4.0	.262	.136	.040	.257	.134	.040	.247	.131	.039	.238	.128	.038	.229	.125	.038		
5.0	.241	.123	.036	.236	.121	.035	.227	.118	.035	.219	.116	.034	.212	.113	.034		
6.0	.222	.111	.032	.218	.110	.032	.210	.108	.031	.203	.105	.031	.196	.103	.031		
7.0	.206	.102	.029	.202	.101	.029	.195	.099	.028	.189	.097	.028	.183	.095	.028		
8.0	.192	.094	.026	.188	.093	.026	.182	.091	.026	.176	.089	.026	.171	.088	.026		
9.0	.179	.087	.024	.176	.086	.024	.171	.084	.024	.165	.083	.024	.160	.081	.024		
10.0	.168	.081	.022	.165	.080	.022	.160	.079	.022	.156	.077	.022	.151	.076	.022		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.190	.163	.140	.162	.140	.120	.111	.096	.083	.064	.056	.048	.020	.018	.016	
2.0	.182	.139	.103	.156	.120	.089	.107	.083	.062	.062	.048	.036	.020	.016	.012	
3.0	.175	.122	.079	.150	.105	.069	.103	.073	.048	.059	.043	.028	.019	.014	.009	
4.0	.167	.109	.064	.144	.094	.055	.099	.065	.039	.057	.038	.023	.018	.012	.008	
5.0	.160	.098	.053	.137	.085	.046	.095	.060	.033	.055	.035	.019	.018	.011	.006	
6.0	.153	.090	.045	.131	.078	.040	.090	.055	.028	.052	.032	.017	.017	.011	.005	
7.0	.146	.083	.040	.125	.072	.035	.087	.051	.025	.050	.030	.015	.016	.010	.005	
8.0	.139	.078	.035	.120	.067	.031	.083	.047	.022	.048	.028	.013	.016	.009	.004	
9.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
10.0	.127	.068	.029	.109	.059	.026	.076	.042	.018	.044	.025	.011	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz										
Lamp Flux:56.53lx1 lm										
NAME: 10 RGBW B					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.: 0.02*1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.7	24.4	25.9	26.2	23.0	24.6	23.3	24.8	25.1
3H	26.0	27.5	26.3	27.7	28.0	24.7	26.1	25.0	26.4	26.6
4H	26.8	28.2	27.2	28.5	28.8	25.3	26.7	25.6	27.0	27.2
6H	27.5	28.8	27.8	29.1	29.4	25.8	27.1	26.1	27.4	27.7
8H	27.7	29.0	28.1	29.3	29.6	25.9	27.2	26.3	27.5	27.8
12H	27.9	29.1	28.2	29.4	29.7	26.1	27.3	26.4	27.6	27.9
4H 2H	24.8	26.2	25.1	26.4	26.7	24.0	25.4	24.3	25.6	25.9
3H	26.9	28.1	27.2	28.4	28.7	25.8	27.0	26.1	27.3	27.6
4H	27.8	28.9	28.2	29.3	29.6	26.5	27.7	26.9	28.0	28.4
6H	28.6	29.6	29.0	30.0	30.4	27.1	28.1	27.5	28.5	28.9
8H	28.9	29.8	29.3	30.2	30.6	27.3	28.3	27.8	28.7	29.1
12H	29.1	30.0	29.6	30.4	30.8	27.5	28.4	28.0	28.8	29.2
8H 4H	28.1	29.0	28.5	29.4	29.8	27.0	27.9	27.4	28.3	28.7
6H	29.1	29.9	29.5	30.3	30.7	27.8	28.6	28.2	29.0	29.4
8H	29.5	30.2	30.0	30.6	31.1	28.1	28.8	28.6	29.2	29.7
12H	29.8	30.4	30.3	30.8	31.3	28.4	29.0	28.9	29.4	29.9
12H 4H	28.1	29.0	28.6	29.4	29.8	27.1	27.9	27.5	28.3	28.8
6H	29.2	29.8	29.6	30.3	30.8	27.9	28.6	28.4	29.1	29.5
8H	29.6	30.2	30.1	30.7	31.2	28.3	28.9	28.8	29.4	29.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.6				

CIE Pub.117, 56.53 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -10.0)
Area: 0.02 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	53	42	35	52	41	34	28
0.80	64	52	44	63	51	44	61	51	44	36
1.00	73	61	53	71	60	53	69	62	52	45
1.25	80	69	61	78	68	61	76	66	60	52
1.50	85	75	67	83	74	66	80	72	65	57
2.00	92	83	76	91	82	75	87	80	74	65
2.50	97	88	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	94	88	83	74
4.00	105	98	93	102	96	92	98	93	89	80
5.00	107	102	97	105	100	96	100	96	93	83
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:

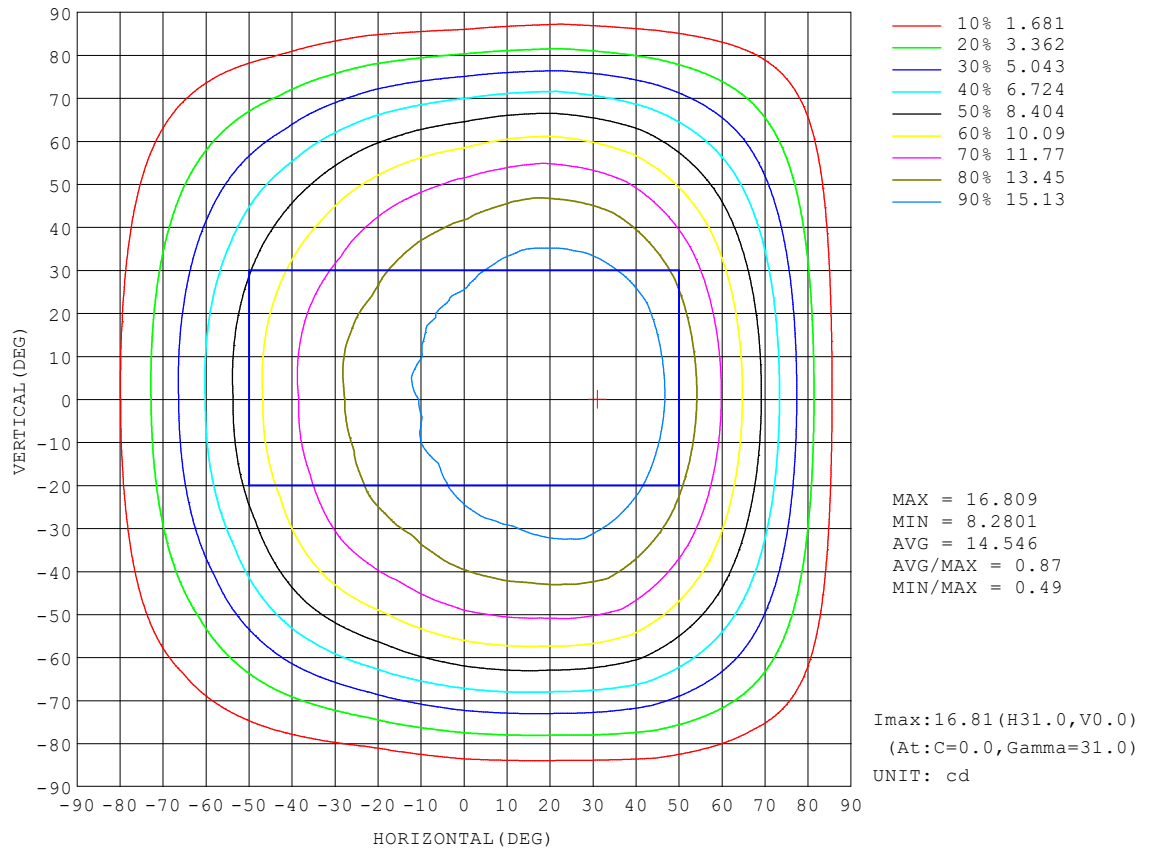


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:

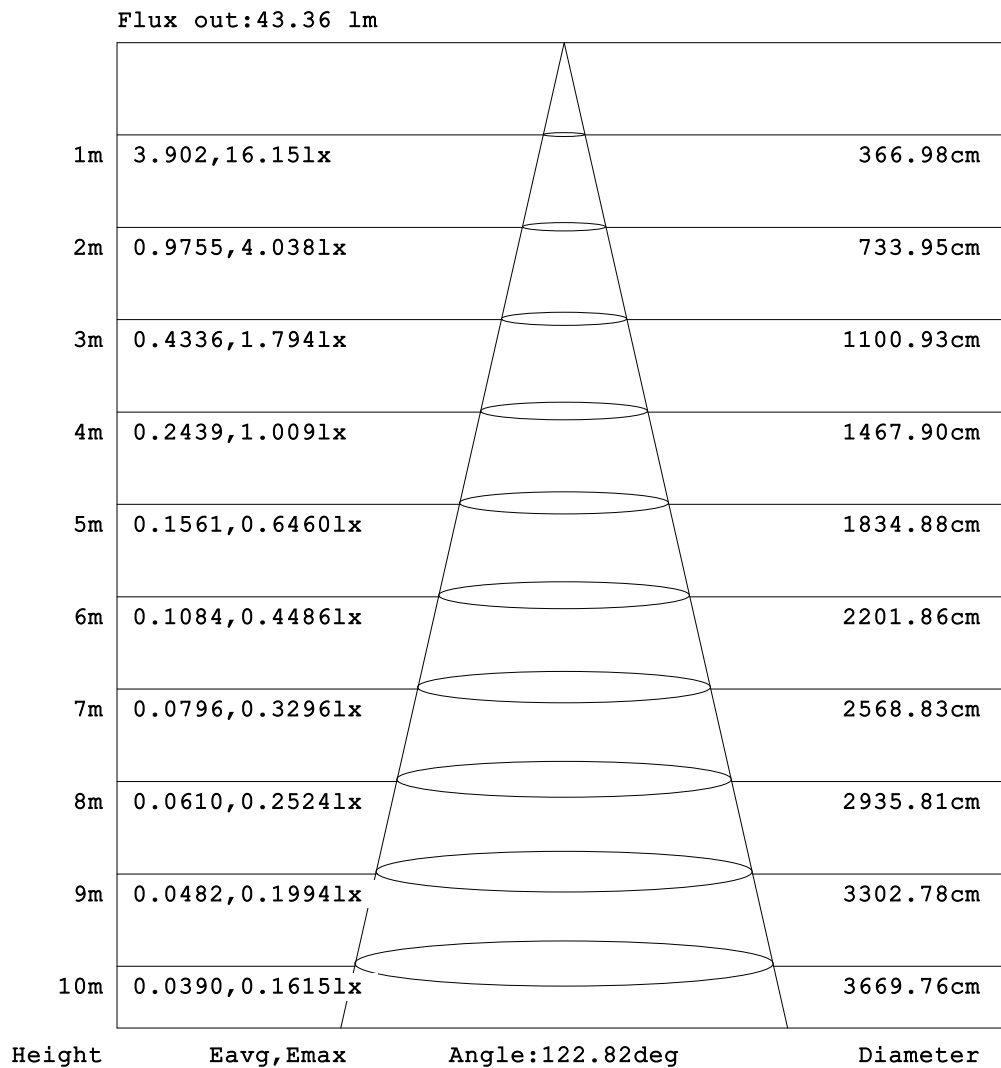


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:

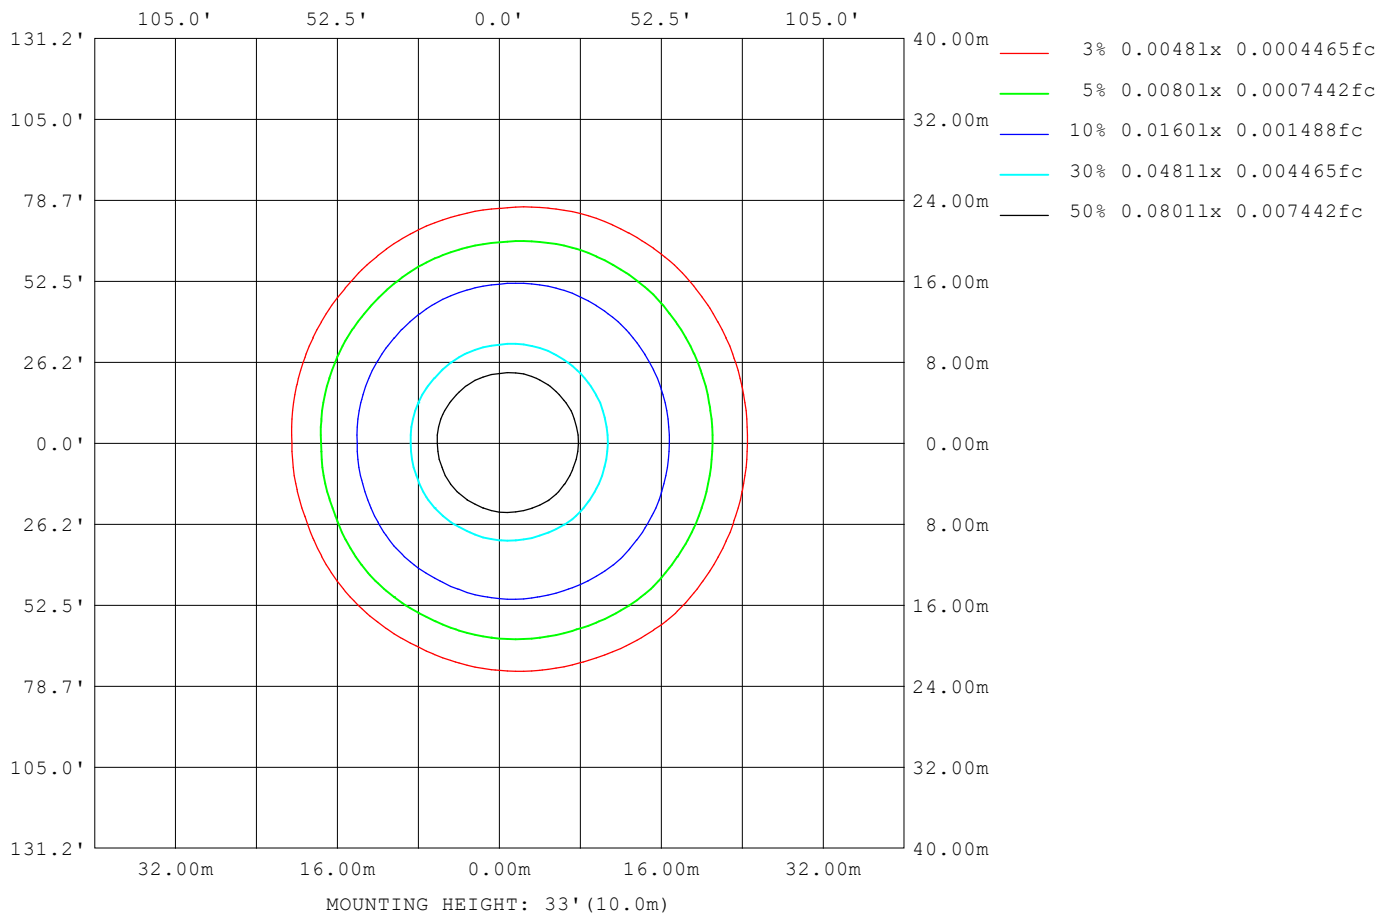

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz Lamp Flux:56.531x1 lm		
NAME: 10 RGBW B	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.02*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	916
L_0~180 (75) av	860
L_0~180 (85) av	754
L_90~270 (65) av	930
L_90~270 (75) av	889
L_90~270 (85) av	949
L_45 (65) av	951
L_45 (75) av	896
L_45 (85) av	882

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

Planar Illuminance Curve

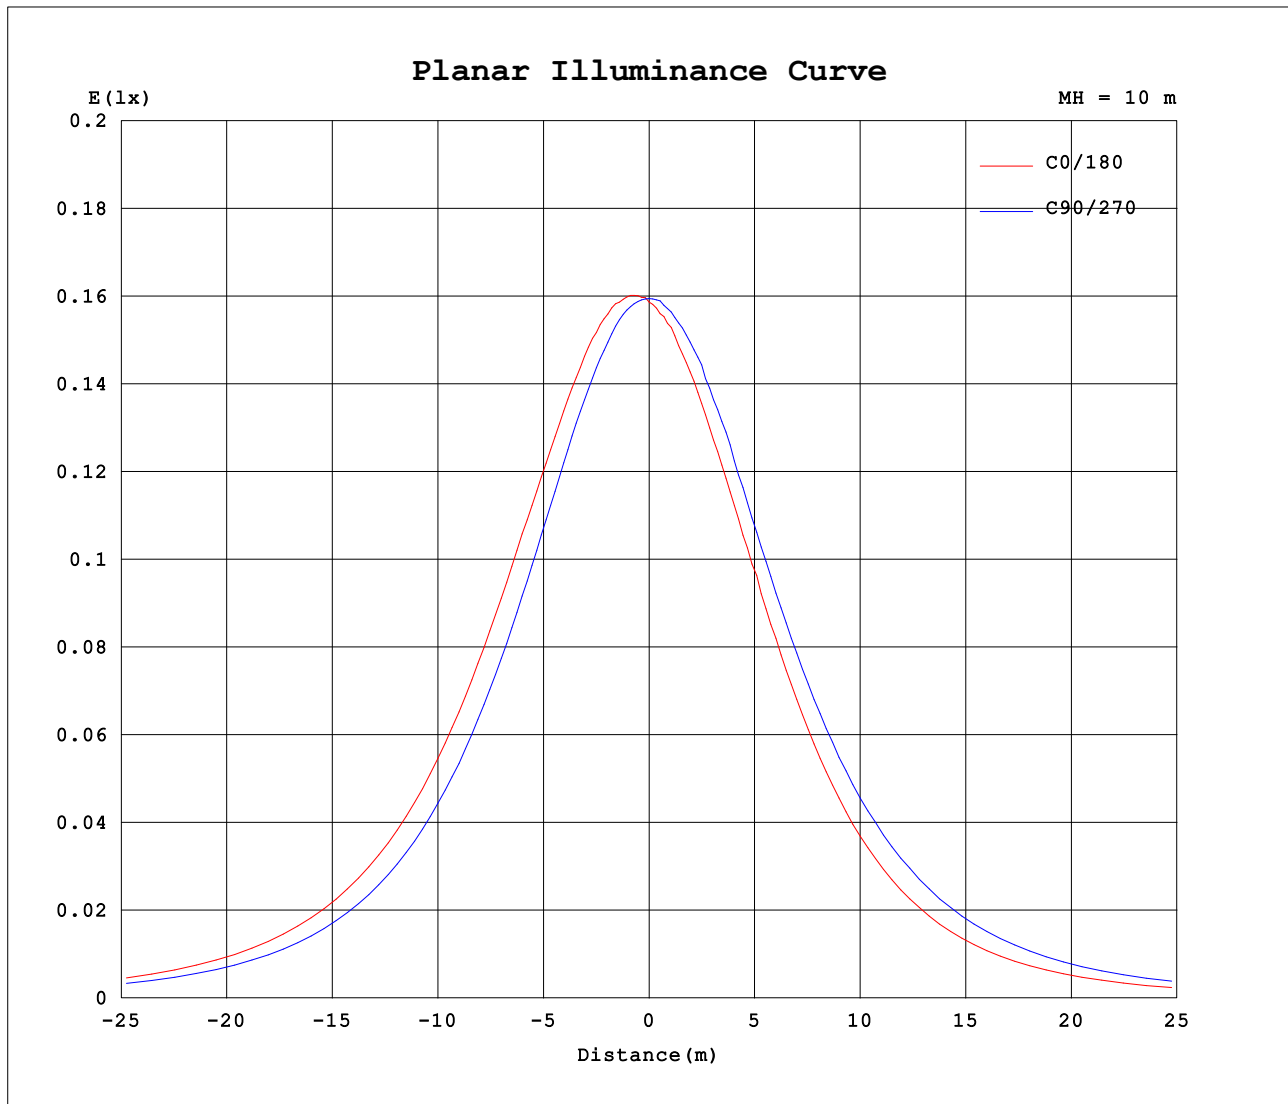

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JINZHI
Test Date: 2021-06-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 9.660m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.001V I:0.1648A P:3.9554W PF:1.0000 Freq:0Hz																	
Lamp Flux:56.531x1 lm																	
NAME: 10 RGBW B									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.:									SUR.: 0.02*1						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)																	
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	
0	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.9	
5	16.3	16.2	16.1	15.9	15.9	15.8	15.6	15.6	15.6	15.6	15.7	15.9	15.9	16.1	16.1	16.3	
10	16.6	16.4	16.3	15.9	15.9	15.6	15.3	15.3	15.2	15.3	15.4	15.7	15.8	16.1	16.3	16.5	
15	16.8	16.6	16.3	15.8	15.7	15.3	15.0	14.8	14.8	14.9	15.1	15.4	15.7	16.2	16.4	16.7	
20	16.8	16.6	16.3	15.7	15.4	14.9	14.5	14.4	14.4	14.5	14.7	15.0	15.6	16.2	16.4	16.8	
25	16.9	16.5	16.3	15.5	15.1	14.5	14.0	13.9	13.9	13.9	14.2	14.7	15.2	16.0	16.2	16.8	
30	16.9	16.4	16.2	15.2	14.6	13.9	13.5	13.2	13.2	13.4	13.6	14.2	14.8	15.7	16.1	16.8	
35	16.7	16.2	15.9	14.8	14.1	13.3	12.9	12.5	12.5	12.7	13.0	13.6	14.3	15.3	15.8	16.6	
40	16.2	15.7	15.4	14.2	13.4	12.6	12.1	11.7	11.5	11.8	12.3	12.9	13.7	14.8	15.4	16.2	
45	15.5	15.1	14.7	13.4	12.6	11.7	11.2	10.7	10.5	10.8	11.4	12.1	12.9	14.2	14.8	15.5	
50	14.5	14.2	13.8	12.4	11.5	10.7	10.1	9.51	9.34	9.72	10.4	11.2	12.0	13.3	14.0	14.6	
55	13.3	13.0	12.7	11.3	10.4	9.47	8.86	8.25	8.12	8.53	9.21	10.1	11.0	12.3	13.0	13.4	
60	11.8	11.5	11.2	9.88	8.98	8.08	7.53	6.89	6.80	7.21	7.93	8.82	9.70	11.0	11.6	11.9	
65	10.05	9.83	9.55	8.29	7.46	6.60	6.01	5.47	5.45	5.84	6.53	7.45	8.26	9.49	10.0	10.2	
70	8.11	7.92	7.67	6.52	5.81	5.03	4.53	4.08	4.12	4.53	5.05	5.93	6.69	7.79	8.25	8.30	
75	6.09	5.91	5.66	4.75	4.15	3.44	3.04	2.71	2.81	3.16	3.64	4.44	5.05	5.93	6.23	6.29	
80	3.99	3.83	3.64	2.99	2.62	2.03	1.80	1.54	1.65	1.95	2.27	2.94	3.44	4.12	4.26	4.17	
85	1.90	1.64	1.79	1.48	1.35	0.94	0.88	0.68	0.73	1.04	1.17	1.67	1.96	2.44	2.32	2.15	
90	0.25	0.38	0.69	0.51	0.58	0.32	0.35	0.18	0.09	0.36	0.43	0.73	0.80	1.05	0.83	0.63	
95	0.06	0.06	0.32	0.21	0.32	0.11	0.11	0.05	0.05	0.11	0.05	0.29	0.24	0.44	0.19	0.11	
100	0.06	0.06	0.18	0.08	0.17	0.02	0.08	0.06	0.03	0.06	0.02	0.15	0.06	0.15	0.06	0.05	
105	0.06	0.06	0.08	0.05	0.11	0.02	0.06	0.06	0.03	0.06	0.06	0.08	0.06	0.06	0.06	0.06	
110	0.06	0.06	0.06	0.05	0.06	0.00	0.06	0.06	0.03	0.06	0.06	0.08	0.06	0.05	0.06	0.06	
115	0.06	0.06	0.06	0.05	0.06	0.00	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.06	0.06	
120	0.06	0.08	0.06	0.05	0.06	0.00	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.06	0.06	
125	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.06	0.06	
130	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.08	0.06	
135	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.08	0.06	
140	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.08	0.06	
145	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.08	0.06	
150	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.08	0.06	
155	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.08	0.06	
160	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.08	0.06	
165	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.02	0.06	
170	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.02	0.02	
175	0.06	0.08	0.06	0.05	0.06	0.08	0.06	0.06	0.03	0.06	0.06	0.08	0.08	0.05	0.02	0.02	
180	0.06	0.08	0.06	0.06	0.06	0.08	0.06	0.06	0.08	0.06	0.06	0.08	0.08	0.08	0.02	0.02	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JINZHI
Test Date:2021-06-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks: